




QuickRollTM

Firestop Device

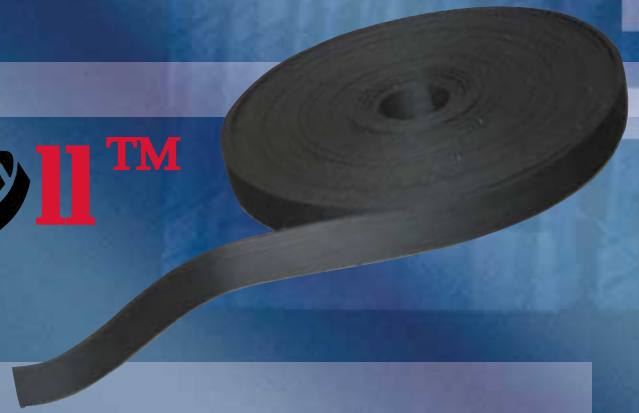

DESCRIPTION:

- A flexible one-piece intumescent strip designed to fit around a new or existing thru-penetration conduit for fire-rated floor or wall assemblies.

FEATURES:

- Convenient one-piece flexible intumescent roll, which is field measured and easily cut to length.
- Can be used for a wide range of applications including EMT conduit in concrete floors and walls, gypsum walls and wood floor/ceiling assemblies (see appropriate system listings).
- Does not require special tools, compaction of mineral wool, or backer materials.

BENEFITS:

- Tested in accordance with ASTM-E814, UL-1479, CAN 4/ULC-S115-95 standards including Canadian 50 Pa pressure differential requirement.
- Eastern QuickrollTM is a pre-measured amount of cured intumescent compound. Simply cut lengths required from the 50 roll for each pipe diameter as referenced in our estimating chart provided on each QuickrollTM box and website www.easternwire.com.
- Can be easily installed from the top of the slab or floor assembly by simply wrapping around the penetrant and tucking it into the opening.
- QuickrollTM is easily measured to length. Measurements available on side of QuickrollTM box.
- Readily installed in seconds by tradesperson.
- Can be installed, select length, cut, wrap, and tuck.
- Material waste associated with time consuming methods of installing alternative solutions are not necessary when using QuickrollTM.
- Easily conforms to different types of electrical or data installations. Allows conduit to have couplings or hub-fittings close to openings. Also easily accommodates conduits installed at various angles to the wall or floor.
- Inspections can be accomplished without destructive sampling, saving both time and money.
- Considered environmentally stable and resistant to exposure to humidity.





www.easternwire.com/firestop

QuickR II™
Firestop Device

- Visit our web site at www.easternwire.com/firestop for a complete up-to-date listing of all our tested systems and installation drawings.
- Select the proper Quickroll™ length (from table provided) for the conduit application based on size and type, along with the fire-rating and construction of the floor or wall assembly being penetrated.
- Once the correct length of Quickroll™ needed has been determined, cut the Quickroll™, and wrap it around the conduit using a butt-seam, tape it together, and tuck into opening.



Part Number and Description	Quantities per box
QR-50 10" wide x 50' individual package	1 roll



Eastern provides technical support to assist in product selection, proper installation and any other technical questions. System drawings are available for submittal purposes upon request.

Visit our website at www.easternwire.com/firestop for further information.

Distributed By

Eastern Wire + Conduit

25 Sims Crescent • Richmond Hill, ON L4B 1C9 • Toll Free 1-800-483-3473 • Fax: (905) 731-9570

www.easternwire.com/firestop

tyco

Electrical &
Metal Products

Copyright © 2004 by Eastern Wire + Conduit. All rights reserved.

Eastern Wire + Conduit reserves the right to change product design and specifications without notice.

QuickRoll, QuickPass, Raceway Collar, Eastern Wire + Conduit and Tyco are registered trademarks or trademarks of Tyco and/or its affiliates in the United States, Canada, and/or other countries. All other brand names, product names, or trademarks belong to their respective holders.