




QuickRoll II™

Firestop Device

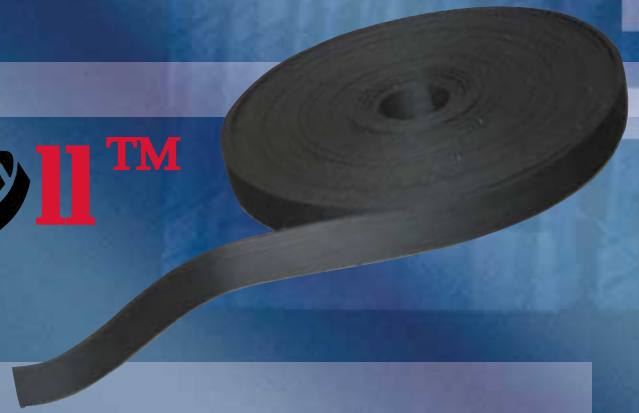

DESCRIPTION:

- A flexible one-piece intumescent strip designed to fit around a new or existing thru-penetration conduit for fire-rated floor or wall assemblies.

FEATURES:

- Convenient one-piece flexible intumescent roll, which is field measured and easily cut to length.
- Can be used for a wide range of applications including EMT conduit in concrete floors and walls, gypsum walls and wood floor/ceiling assemblies (see appropriate system listings).
- Does not require special tools, compaction of mineral wool, or backer materials.

BENEFITS:

- Tested in accordance with ASTM-E814, UL-1479, CAN 4/ULC-S115-95 standards including Canadian 50 Pa pressure differential requirement.
- Eastern Quickroll™ is a pre-measured amount of cured intumescent compound. Simply cut lengths required from the 50 roll for each pipe diameter as referenced in our estimating chart provided on each Quickroll™ box and website www.easternwire.com.
- Can be easily installed from the top of the slab or floor assembly by simply wrapping around the penetrant and tucking it into the opening.
- Quickroll™ is easily measured to length. Measurements available on side of Quickroll™ box.
- Readily installed in seconds by tradesperson.
- Can be installed, select length, cut, wrap, and tuck.
- Material waste associated with time consuming methods of installing alternative solutions are not necessary when using Quickroll™.
- Easily conforms to different types of electrical or data installations. Allows conduit to have couplings or hub-fittings close to openings. Also easily accommodates conduits installed at various angles to the wall or floor.
- Inspections can be accomplished without destructive sampling, saving both time and money.
- Considered environmentally stable and resistant to exposure to humidity.





www.easternwire.com/firestop



INSTALLATIONS:

- Visit our web site at www.easternwire.com/firestop for a complete up-to-date listing of all our tested systems and installation drawings.
- Select the proper Quickroll“ length (from table provided)for the conduit application based on size and type, along with the fire-rating and construction of the floor or wall assembly being penetrated.
- Once the correct length of Quickroll“ needed has been determined, cut the Quickroll“, and wrap it around the conduit using a butt-seam, tape it together, and tuck into opening.



PACKAGING:

Part Number and Description	Quantities per box
QR-50 1” wide x 50’ individual package	1 roll

TECHNICAL SERVICES:

Eastern provides technical support to assist in product selection, proper installation and any other technical questions. System drawings are available for submittal purposes upon request.

Visit our website at www.easternwire.com/firestop for further information.



Distributed By

Eastern Wire + Conduit

25 Sims Crescent • Richmond Hill, ON L4B 1C9 • Toll Free 1-800-483-3473 • Fax: (905) 731-9570

www.easternwire.com/firestop

tyco

Electrical &
Metal Products

Copyright © 2004 by Eastern Wire + Conduit. All rights reserved.

Eastern Wire + Conduit reserves the right to change product design and specifications without notice.

QuickRoll, QuickPass, Raceway Collar, Eastern Wire + Conduit and Tyco are registered trademarks or trademarks of Tyco and/or its affiliates in the United States, Canada, and/or other countries. All other brand names, product names, or trademarks belong to their respective holders.